

Inert Test 2 - Luna 5 μ C5

Column: Luna[®] 5 μ m C5 100 Å, LC Column 150 x 4.6 mm, Ea

Dimensions: 150 x 4.6 mm ID

Order No: 00F-4043-E0

Elution Type: Isocratic

Eluent A: Acetonitrile

Eluent B: Water

Gradient Profile:	Step No.	Time (min)	Pct A	Pct B
1	1	0	50	50

Flow Rate: 1 mL/min

Col. Temp.: 25 °C

Detection: Refractive Index @ 0.0000000000 (ambient)


Analyst Note: SecurityGuard[™] Guard Cartridge System extends column lifetime.

- SecurityGuard Cartridges, C5 4 x 3.0mm, 10/Pk Part No.: AJ0-4293

- Holder Part No.: KJ0-4282



Products used in this application:

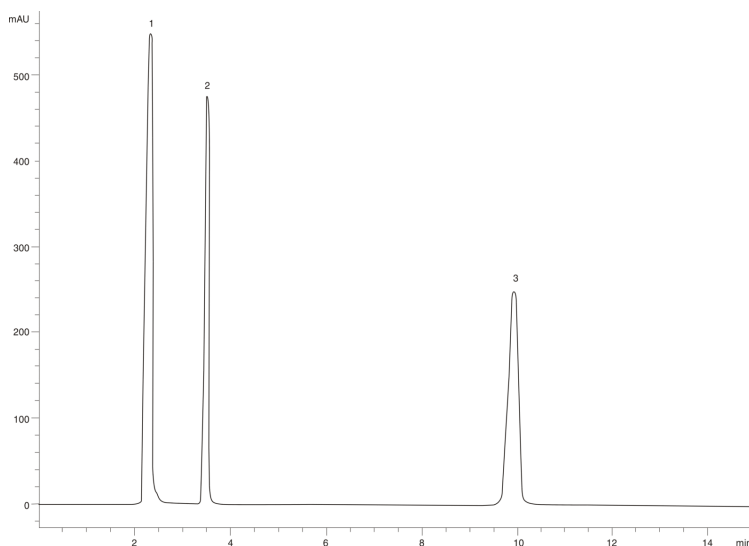

ANALYTES:

- 1 Pyridine
- 2 Phenol
- 3 Toluene

