HPLC Application

ID No.: **20558**

Acebutolol on Lux 5µm Cellulose-1 in NP

Column: Lux® 5 µm Cellulose-1, LC Column 250 x 4.6 mm, Ea
Dimensions: 250 x 4.6 mm ID
Order No: 00G-4459-E0
Elution Type: Isocratic
Eluent A: Hexane / EtOH (90:10) DEA (0.1%)

Gradient Profile:	**Step No.**	**Time (min)**	**Pct A**
	1	0	100

Flow Rate: 1 mL/min
Col. Temp.: ambient
Detection: Circular Dichroism @ 0.0000000000 (ambient)
Analyst Note: SecurityGuard™ Guard Cartridge System extends column lifetime.

- SecurityGuard Cartridges, Lux Cellulose-1, 4 x 3.0mm ID, 10/Pk Part No.: AJ0-8403
- Holder Part No.: KJ0-4282

Products used in this application:

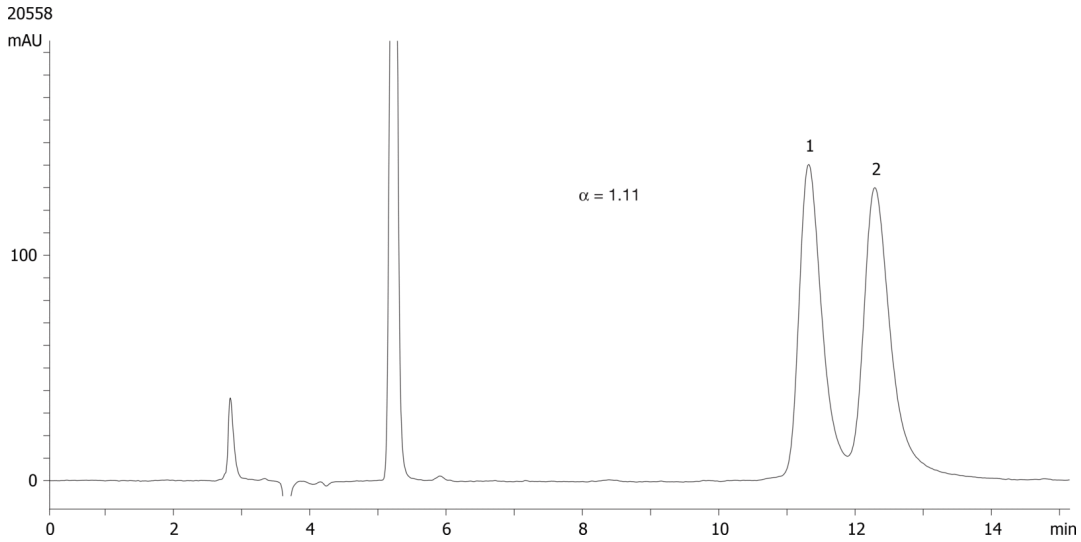

ANALYTES:

1 Acebutolol
Retention Time: 11.34 min

2 Acebutolol
Retention Time: 12.32 min

©2025 Phenomenex Inc. All rights reserved.

For more information contact your Phenomenex Representative at support@phenomenex.com

Phenomenex products are available worldwide.