

Polystyrene MW Standard on Phenogel 5u 50A with SecurityGuard

Column: Phenogel™ 5 µm 50A, LC Column 300 x 7.8 mm, Ea

Dimensions: 300 x 7.8 mm ID

Order No: 00H-0441-K0

Elution Type: Isocratic

Eluent A: THF

Gradient

Step No.	Time (min)	Pct A
1	0	100

Profile:

Flow Rate: 1 mL/min


Col. Temp.: ambient

Detection: Electrospray Mass Spec (ESMS) @ 0.0000000000 (ambient)

22611



Products used in this application:

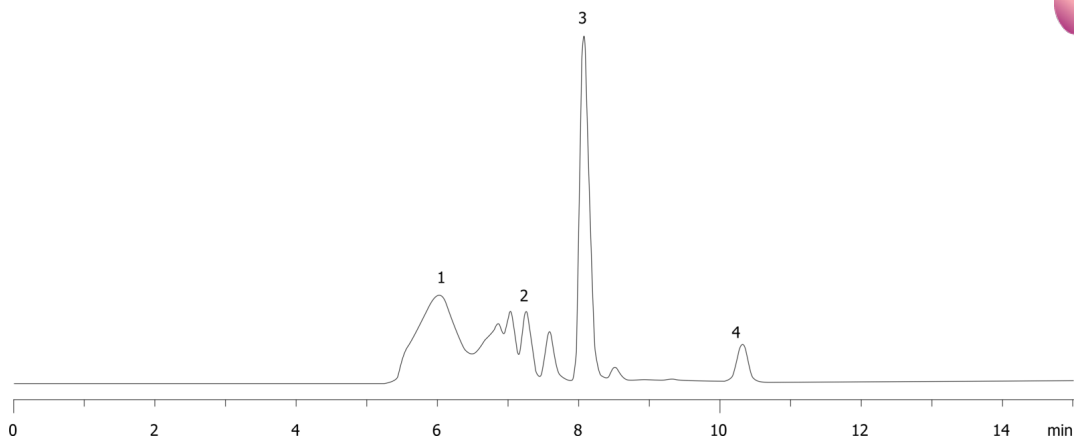

ANALYTES:

1 2400 Da

2 1490 Da

3 545 Da

4 162 Da

