

Analytical loading study using Kinetex 5u EVO C18 150x4.6mm


Column: Kinetex® 5µm EVO C18 100 Å, LC Column 150 x 4.6 mm, Ea
Dimensions: 150 x 4.6 mm ID
Order No: 00F-4633-E0
Elution Type: Isocratic
Eluent A: Water with 0.1% TFA
Eluent B: Acetonitrile with 0.1% TFA
Gradient

Step No.	Time (min)	Pct A	Pct B
1	0	40	60

Profile:
Flow Rate: 1.5 mL/min
Col. Temp.: 40 °C
Detection: Electrospray Mass Spec (ESMS) @ 0.0000000000 (ambient)



Products used in this application:

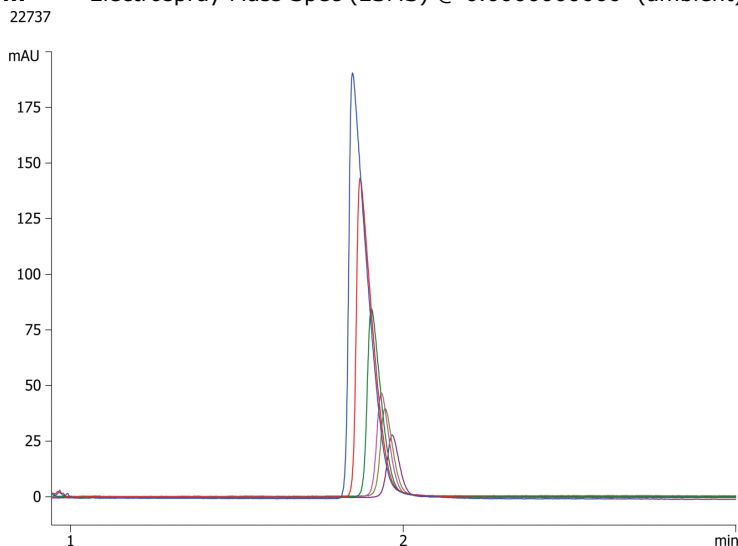

ANALYTES:

1 Nortriptyline 1-10ug load

