

Organic Acid Standards on Kinetex F5


Column: Kinetex® F5 2.6µm 100 Å, LC Column 150 x 4.6 mm, Ea
Dimensions: 150 x 4.6 mm ID
Order No: 00F-4723-E0
Elution Type: Isocratic
Eluent A: 20mM potassium phosphate, pH 1.59
Gradient

Step No.	Time (min)	Pct A
1	0	100

Flow Rate: 1.25 mL/min
Col. Temp.: ambient
Detection: Electrospray Mass Spec (ESMS) @ 0.0000000000 (ambient)



Products used in this application:

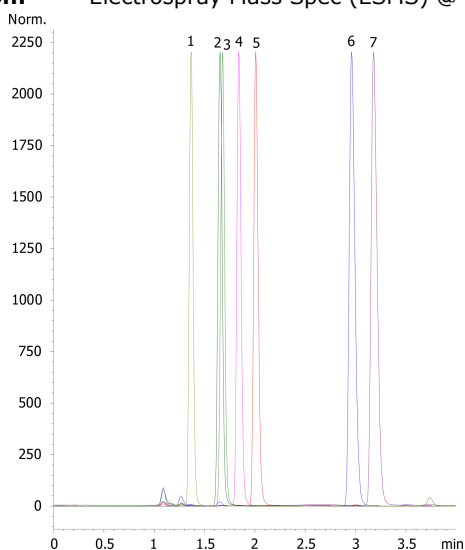

ANALYTES:

- 1 tartaric acid
- 2 malic acid
- 3 lactic acid
- 4 acetic acid
- 5 citric acid
- 6 succinic acid

