


Analysis of PCBs on a 40m Zebtron ZB-Dioxin GC Column by GC-MS/MS**Column:** ZebtronTM ZB-Dioxin, GC Cap. Column 40 m x 0.18 mm x 0.14 μ m, Ea**Phase:****Dimensions:** 40 meters x 0.18 mm x 0.14 μ m**Order No:** 7PD-G045-47**Oven Profile:** to 175°C @ 50°C/min to 220°C @ 15°C/min to 250°C @ 5°C/min 250°C for 3 min to 300°C @ 50°C/min 300°C for 10 min**Carrier Gas:** Constant Flow Helium, 0.8 mL/min**Injection:** Splitless :1 1 μ L @ 290°C**Detection:** GC/MS/MS (300°C)**Products used in this application:**

Analysis of PCBs on a 40m Zebron ZB-Dioxin GC Column by GC-MS/MS

ANALYTES:

- 1 PCB-28
- 2 PCB-31
- 3 PCB-52
- 4 PCB-101
- 5 PCB-81
- 6 PCB-77
- 7 PCB-123
- 8 PCB-118
- 9 PCB-114
- 10 PCB-153
- 11 PCB-105
- 12 PCB-138
- 13 PCB-126
- 14 PCB-167/128
- 15 PCB-156
- 16 PCB-157
- 17 PCB-180
- 18 PCB-169
- 19 PCB-189

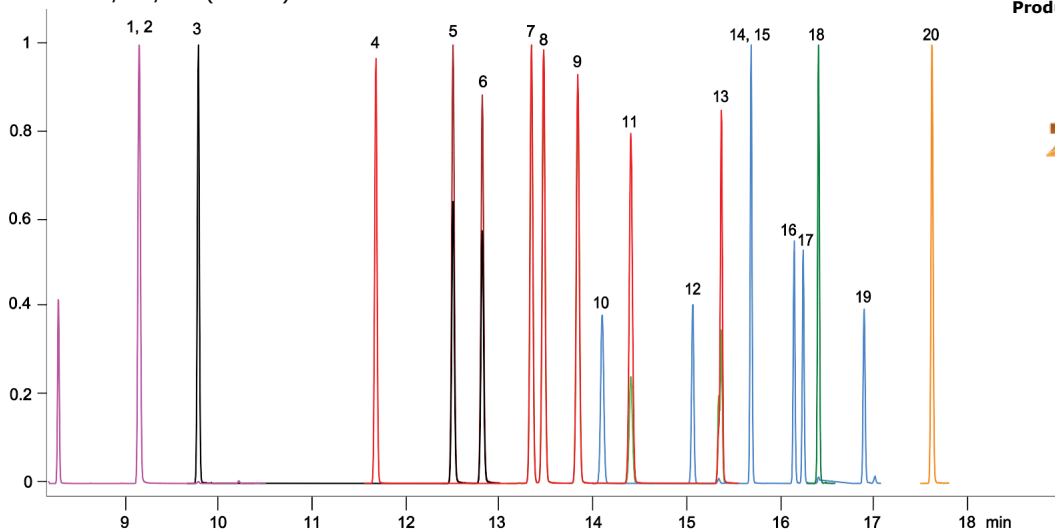